

VISAM Touch Panel „VTP-BX171“

Operator panel with 17" display and SCADA functionality

Artikel-Nummer:

VTP-BX171-x



Industrie
Computer 1

Panel
Computer 2

Industrie
Displays 3

Medical
Computer 4

Automation 5

Software 6

- Compatible with all common remote systems

The VTP-BX series of operator terminals consists of 3 devices with 12", 15" and 17" screens. The modern design line is suitable for a wide range of applications and offers IP66-certified protection against dust and liquids with the flat and gap-free front panel. The displays, in the classic 4:3 format, are equipped with LED backlight and resistive touchscreen.

The operating units are designed for the adverse conditions in industrial environments. They operate completely fanless, are free of moving parts and can be used even under strong vibrations (max. 1 Grms) and shocks. The wide temperature range of -20 to 60° Celsius opens up additional fields of application for the HMI devices, e.g. outdoors.

Strong hardware equipment with Intel Atom Quad-Core CPU as well as fast RAM and SSD memory enable smooth operation of the application, even in demanding automation projects. The BX operating devices are delivered with

- Includes complete software package: Editor, Runtime and OS

Windows 10 IOT as well as with the „large“ VBASE Runtime. VBASE Pro-RT processes more process images and variables than the compact runtime.

- Full-graphic operating unit with 17" TFT display and touchscreen
- Integrated interfaces:
2x G-LAN, 2x COM, 4x USB
- Extended operating temperature: -20 ~ 60° C
- IP66 front panel
- incl. HMI / SCADA development software, runtime environment and operating system

Common specification

Artikel-Nummer:

VTP-BX171-x

Hardware:

CPU	Intel® Atom™ E3845 1.91 GHz (Quad Core, fanless)
RAM	4GB DDR3L 1600MHz SO-DIMM SDRAM
Storage	4GB MSATA
Interfaces	2x 10/100/1000 Base-T Ethernet 1x RS-232 1x RS-232/422/485 1x USB 3.0 3x USB 2.0
Expansion	Full-size Mini PCI-E iDoor

LCD Display:

Size / Type	17" SXGA TFT LCD
max. Colors	16,7 Mio.
Resolution	1280 x 1024 Pixel
Viewing angle	160° / 140° (H/V)
Luminance	350 cd/m ²
Contrast ratio	800 : 1
Backlight	LED, 50.000 h MTBF

Touchscreen:

Type	5-wire, analog resistive
Resolution	linear
Transparency	> 75%
Duration	36 mio. touches with silicon rubber


Environment:

Construction	Front panel: die-cast Al-Mg, Chassis: SECC
Certificate	CE, BSMI, CCC, FCC, UL
Protection	IP66 (front)
Dimension	410.4 x 343.4 x 56.9 mm
Weight	5.1 kg
Energy	29W Typical, 58W Max. 24 VDC ±20%
Vibration	1 Grms (operating, random)
Temperature	Operating: -20 ~ 60° C (-4 ~ 140° F) Storage: -30 ~ 70° C (-22 ~ 158° F)
rel. Humidity	10 ~ 90% @ 40° C, non-condensing

Options

- MPI-Adapter, PPI-Adapter
- 100 ~ 240 VAC PSU

Rear / Interfaces:

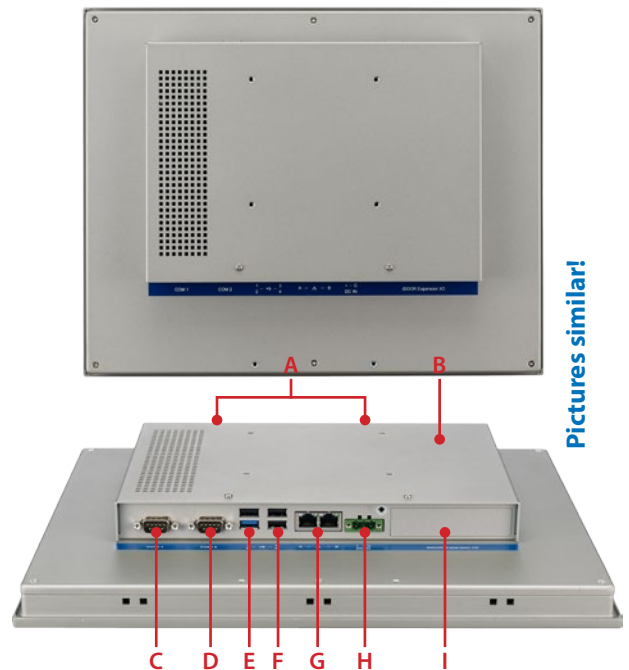

- A. Antenna
- B. SSD bay
- C. RS-232

- D. RS-232/422/485
- E. USB 3.0
- F. USB 2.0

- G. Gigabit LAN
- H. 24 VDC in
- I. iDoor

Software:



OS	Windows 10 IOT 64bit LTSC
HMI Runtime	VBASE Pro-RT
HMI functions:	
▪ Fullgraphical process visualization	
▪ Handling, monitoring and steering of processes	
▪ Messaging system	
▪ Multi-language support	
▪ Logging of process data	
▪ Recipe administration in up to 16 levels	
▪ Access safety device and user administration	
▪ Database interface	
▪ Line recorder functionality	
▪ Integrated programming language	
▪ VBASE Web-Remote: HTML5 HMI interface	
▪ Compatible with all common automation protocols, field busses and remote systems	

Errors and technical changes reserved. Pictures may differ from the original.